


## BETSY ROSS MAIN PANEL QUILT



46" x 55"

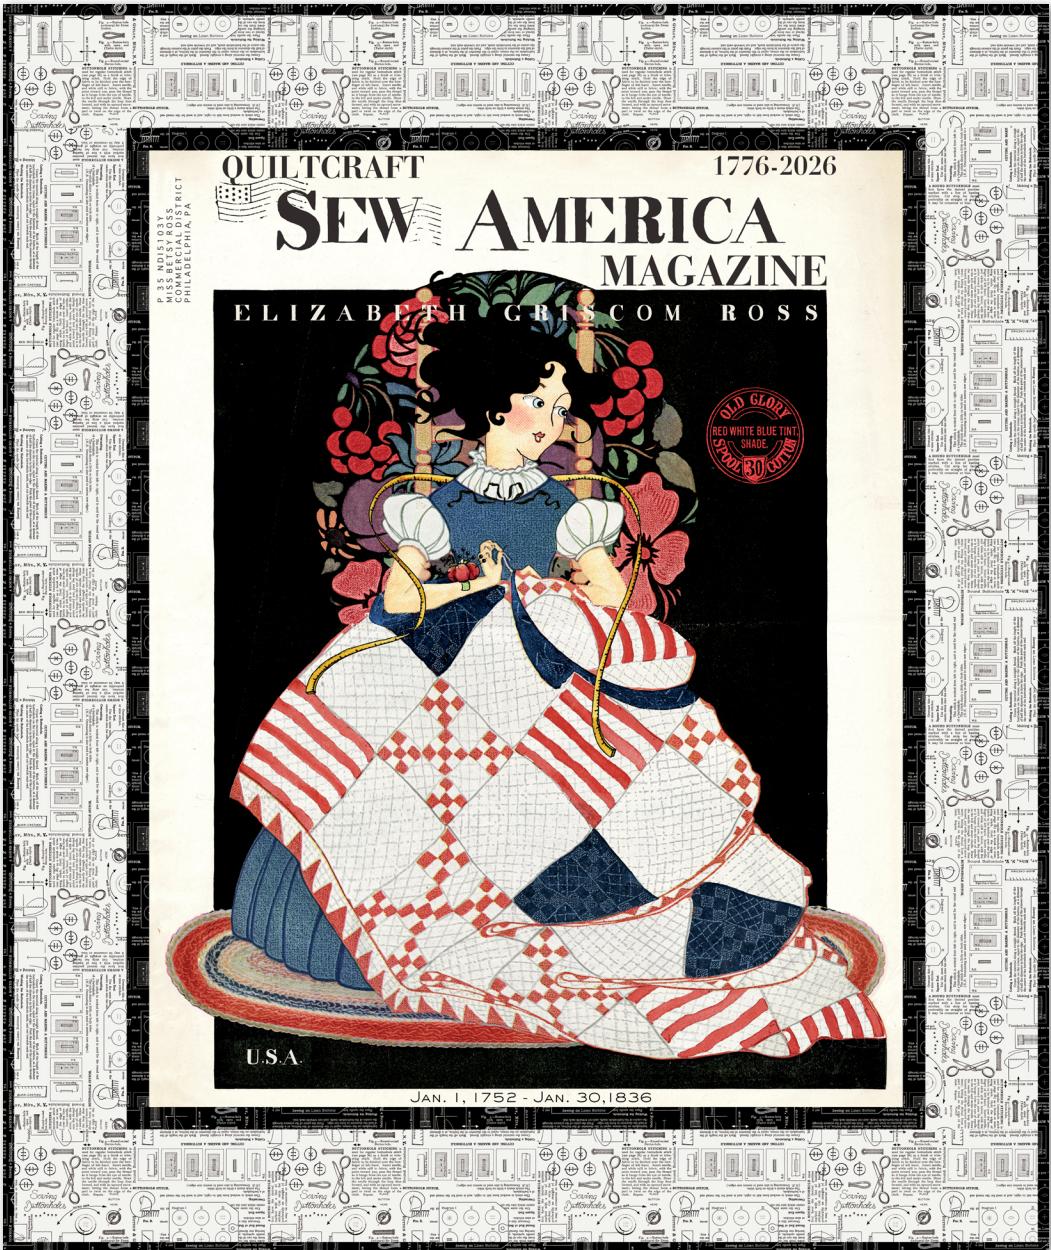

= Confident Beginner

02/01/2026

# BETSY ROSS MAIN PANEL QUILT

## FINISHED QUILT SIZE 46" x 55"

Please read all instructions before beginning this project. Yardage calculated using a 42" usable width of fabric. Pattern designed by J. Wecker Frisch of Great Joy Studio.

## GENERAL INSTRUCTIONS

Please check [www.rileyblakedesigns.com/pattern-updates](http://www.rileyblakedesigns.com/pattern-updates) or scan the QR Code for any updates before starting this project. This pattern requires a basic knowledge of quilting techniques and terminology. The quilt and block diagrams portrayed are virtual images. The layout and look of your project may differ when using actual fabric. It is not recommended to prewash fabric before cutting and assembling.



Always verify your panel size before beginning. If your panel measurements differ from those given in the pattern, trim to the desired size or use coping strips to alter the size of your panel. If coping strips are needed, add oversized, coordinating strips of fabric to the necessary edges of the panel, then trim to the size specified in the pattern.

WOF = Width of Fabric

RST = Right Sides Together

## FABRIC REQUIREMENTS

Fabrics are from the Sew America collection unless stated otherwise.

(1) PD17340-PANEL Betsy Ross Main Panel

### Additional Fabrics:

1 yard C17348-OFFWHITE Sewing Notes

$\frac{3}{4}$  yard C17348-BLACK Sewing Notes (includes binding)

## OTHER SUPPLIES

Basic Sewing Supplies

1  $\frac{1}{2}$  yards WB660-RED Swiss Dot (wide back backing)

Batting

## CUTTING INSTRUCTIONS

When cutting fabrics, use a straight edge ruler and rotary cutter. Measurements include  $\frac{1}{4}$ " seam allowance. Label, allocate, and organize all cuts as noted.



### Betsy Ross Main Panel

Fussy cut (1) 34" x 43" Panel rectangle, centered over the motif.\*

*\*Note: If the panel motif does not reach the edge of the required cut, add coping strips first and then trim to the required size.*




### Off White Sewing Notes

Cut (5) 5  $\frac{1}{2}$ " x WOF strips. Piece together end-to-end; subcut:

(2) 5  $\frac{1}{2}$ " x 46" strips. Label as A.

(2) 5  $\frac{1}{2}$ " x 45" strips. Label as B.



### Black Sewing Notes

Cut (6) 2  $\frac{1}{2}$ " x WOF strips. Set aside for binding.

Cut (4) 1  $\frac{1}{2}$ " x WOF strips. Piece together end-to-end; subcut:

(2) 1  $\frac{1}{2}$ " x 43" strips. Label as C.

(2) 1  $\frac{1}{2}$ " x 36" strips. Label as D.

## SEWING TECHNIQUES

Sew all seams RST and with a  $\frac{1}{4}$ " seam allowance unless stated otherwise. Refer to the Quilt Layout Diagram for placement of the fabrics. Press seams as desired unless stated otherwise. Dimensions listed in steps are unfinished sizes.

# BETSY ROSS MAIN PANEL QUILT

## QUILT ASSEMBLY

1. Sew (1) **C**-strip to each side of the Panel rectangle as shown below. Next, sew (1) **D**-strip to the top and bottom. In the same manner, sew **B**-strips to the sides and **A**-strips to the top and bottom to complete the quilt top.

QUILT LAYOUT DIAGRAM



## FINISHING INSTRUCTIONS

2. Layer the quilt top, batting, and backing. Baste the quilt layers together and quilt as desired. Sew the Black Sewing Notes binding strips together end-to-end. Then bind the trimmed, finished quilt using your favorite binding method.

Enjoy and share your quilt using the hashtags: [#sewamericafabric](#), [#betsyrossmainpanelquilt](#), [#rileyblakedesigns](#), and [#iloverileyblake](#).