

HOT PAD POCKETS

Riley Blake
DESIGNS®



9" x 9"



= Confident Beginner



HOT PAD POCKETS

FINISHED HOT PAD SIZE 9" × 9"

Please read all instructions before beginning this project.
Pattern designed by Lori Holt of Bee in my Bonnet.

GENERAL INSTRUCTIONS

Please check www.rileyblakedesigns.com/pattern-updates or scan the QR Code for any updates before starting this project. This pattern requires a basic knowledge of quilting techniques and terminology. The diagrams portrayed are virtual images. The layout and look of your project may differ when using actual fabric. It is not recommended to prewash fabric before cutting and assembling.



The fabric and supplies requirements are enough to make (13) total hot pads.

FABRIC REQUIREMENTS

Fabric is from the Baked With Love collection.


(1) 10-17780-42 10" Stacker

OTHER SUPPLIES

Basic Sewing Supplies
(3) Packages Lori Holt $\frac{3}{8}$ " Double Fold Bias Tape
(coordinating with fabrics)
(3) Packages Lori Holt Heat Resistant Batting (ST-24599)
Lori Holt Cute Cuts™ Trim-it™ Ruler 9 $\frac{1}{2}$ " × 9 $\frac{1}{2}$ " (STTI-5530)

CUTTING INSTRUCTIONS

When cutting fabrics, use a straight edge ruler and rotary cutter. Measurements include $\frac{1}{4}$ " seam allowance. Label, allocate, and organize all cuts as noted.

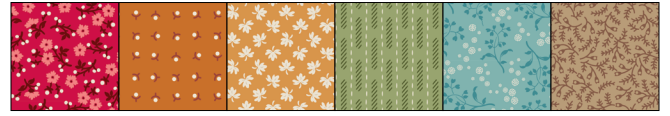

10" Stacker

Set (13) 10" × 10" squares aside for hot pad front.
Set (13) 10" × 10" squares aside for hot pad back.
From each of (7) 10" × 10" squares, cut:
(2) 5" × 10" rectangles for hot pad 1 pocket.
Cut (6) 10" × 10" squares in half diagonally to make
(2) triangles in each fabric for hot pad 2 pocket.



$\frac{3}{8}$ " Double Fold Bias Tape

Cut (7) 52" strips. From each strip, subcut:
(1) 43" strip for hot pad 1 binding.
(1) 9" strip for hot pad 1 pocket binding.
Cut (6) 56" strips. From each strip, subcut:
(1) 43" strip for hot pad 2 binding.
(1) 13" strip for hot pad 2 pocket binding.



Heat Resistant Batting

Cut (26) 10" × 10" squares for hot pad.
Cut (3) 10" × 10" squares. Then cut each in half diagonally to make (6) total triangles for hot pad 2 pocket.
Cut (7) 5" × 10" rectangles for hot pad 1 pocket.


SEWING TECHNIQUES

Refer to the diagrams for placement of the fabrics. Press seams as desired unless stated otherwise. Dimensions listed in steps are unfinished sizes.


HOT PAD POCKETS

HOT PAD 1 ASSEMBLY


1. Lay (1) hot pad back square face down on a flat surface. Next, lay (2) heat resistant batting squares on top. Then finish with (1) hot pad front square right side facing up.

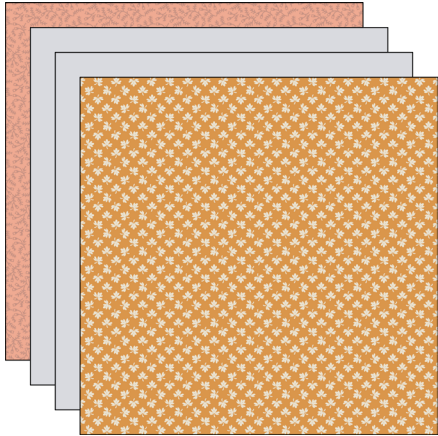


2. Quilt the hot pad as desired. Trim the hot pad to measure 9" x 9".

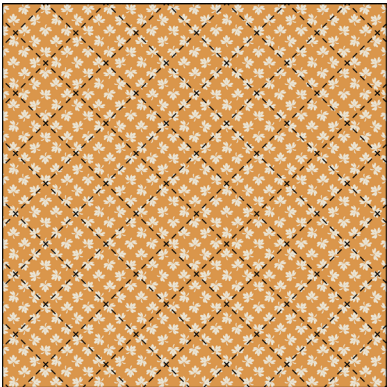


3. Align the Rounded Corner Template from page 6 on (1) corner of the quilted hot pad. Trace along the curved edge, then trim along the marked line to round the corner. Repeat on (3) total corners as shown below.

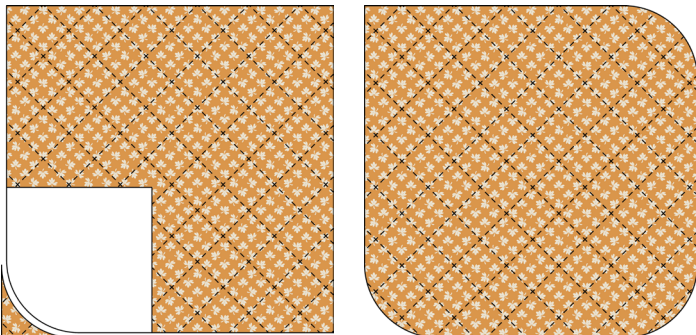

4. Lay (1) hot pad 1 pocket rectangle face down on a flat surface. Next, lay (1) heat resistant batting rectangle on top. Then finish with (1) matching hot pad 1 pocket rectangle right side facing up.

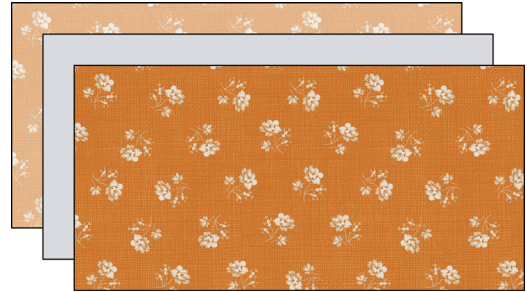

5. Quilt the hot pad pocket as desired. Trim the hot pad pocket to measure 5" x 9". (If needed, you can trim the 5" size down slightly if fabric shifted when quilting.)

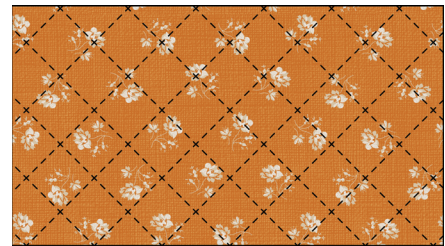

6. Bind (1) long side of the pocket rectangle using the 9" strip of double fold bias tape and sewing with the narrow side on top.



7. Align the Rounded Corner Template from page 6 on (1) bottom corner of the quilted hot pad pocket. Trace along the curved edge, then trim along the marked line to round the corner. Repeat on the second bottom corner as shown below.



HOT PAD POCKETS

8. Position (1) hot pad with the untrimmed corner in the top-left corner. Next, layer (1) pocket on (1) hot pad with side and curved bottom edges aligned. Pin or clip in place. Using a $\frac{1}{8}$ " seam, baste the pocket in place along side and bottom edges.




9. Starting at the top-left corner and moving clockwise, bind the hot pad using the 43" strip of double fold bias tape and sewing with the narrow side on top.




10. When reaching the starting point of the binding, sew off the edge of the hot pad and keep sewing along the bias tape to close the open end on the rest of the strip.



11. Create a loop with the loose strip of bias tape your desired size and trim excess bias tape, leaving approximately $\frac{3}{4}$ " extra for securing to the back.
12. Fold the end of the bias tape under $\frac{1}{4}$ " and pin the end in place on the back of the hot pad, overlapping the bottom edge of the bias tape by approximately $\frac{1}{4}$ ".

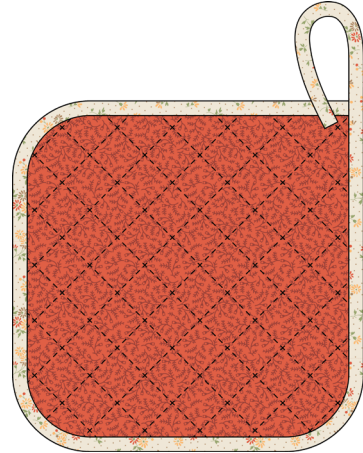

13. Stitch along the edge of the fabric where it meets the bias tape to secure the end of the loop in place, backstitching at the beginning and end, to complete (1) Hot Pad 1.

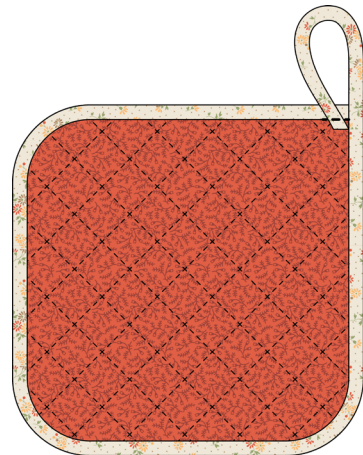


14. Repeat Steps 1-13 to make (7) total of Hot Pad 1.


HOT PAD POCKETS

HOT PAD 2 ASSEMBLY


15. Repeat steps 1-3 to make (1) quilted hot pad.
16. Lay (1) hot pad 2 pocket triangle face down on a flat surface. Next, lay (1) heat resistant batting triangle on top. Then finish with (1) matching hot pad 2 pocket triangle right side facing up.

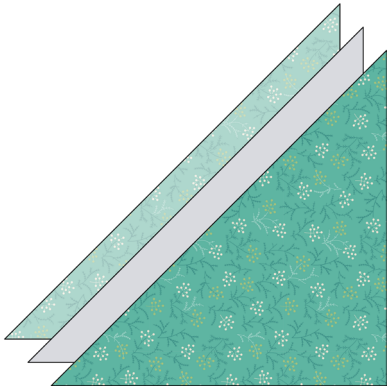


17. Quilt the hot pad pocket as desired. Trim the hot pad pocket so each straight edge measures 9" as shown below.

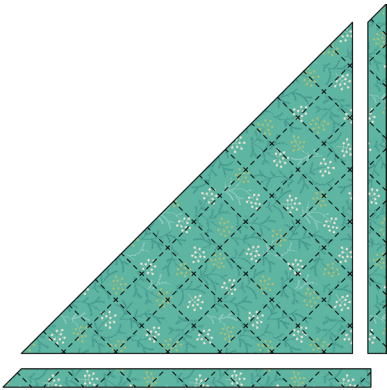

18. Bind (1) diagonal edge of the pocket rectangle using the 13" strip of double fold bias tape and sewing with the narrow side on top. Trim excess bias tape.

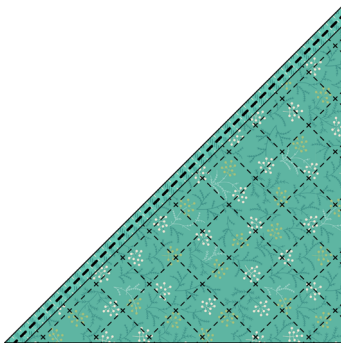

19. Position (1) hot pad with the untrimmed corner in the top-left corner. Next, layer (1) pocket on (1) hot pad with the binding running diagonally from opposite curved edges as shown below. Using the hot pad as a guide, trim the pocket even with the edges of the hot pad.

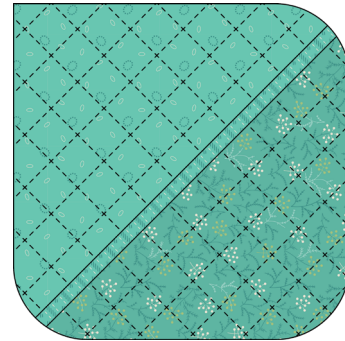

20. Pin or clip the pocket in place. Using a $\frac{1}{8}$ " seam, baste the pocket in place along bottom and side edges.



21. Repeat steps 9-13 to bind the hot pad and add the hanging loop to complete Hot Pad 2.
22. Repeat steps 15-21 to make (6) total of Hot Pad 2.



Enjoy and share your hot pad pockets using the hashtags: [#bakedwithlovecfabric](#), [#hotpadpockets](#), [#rileyblakedesigns](#), and [#iloverileyblake](#).

HOT PAD POCKETS

ROUNDED CORNER TEMPLATE

